
GB Instructions for use

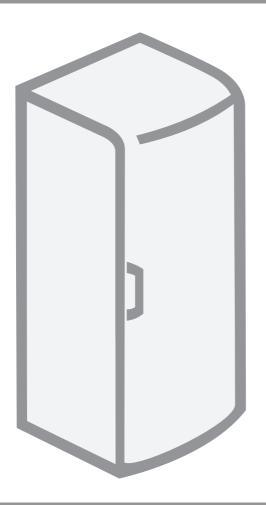

We thank you for the confidence you have shown by purchasing our appliance. We wish you a lot of pleasure using the appliance.

The refrigerator is intended for use in households, for storing fresh food at temperatures higher than 0°C.


Important warnings	3
A few tips on how to save power with your	
refrigerator-freezer combo	4
Appliance description	5
Installation and connection	6
Changing the door opening direction	8
Operating the appliance	9
Storing food in the refrigerator	11
Storage of food in the FreshZone	12
Defrosting the appliance	13
Cleaning the appliance	13
Troubleshooting	
Information on appliance noise	16

Important warnings



- This appliance is manufactured in compliance with relevant safety standards. However, it is still advisable it is not used without due supervision by persons with diminished physical, motoric, or mental capabilities or persons with inadequate experience or knowledge. The same recommendation applies to minors using the appliance.
- Before connecting the appliance, carefully read the instructions for use which describe the appliance and its correct and safe use. The instructions apply to several types / models; therefore, they may include descriptions of settings and equipment that may not be available in your appliance.
- Remove the packaging that is intended for protecting the appliance or its respective parts during transport. Remove the spacers installed on the door corners and replace them with hole plugs / covers.
- Warning: the appliance should be secured against tripping, using the supplied bracket – see instructions, chapter "Installation and Connection".
- Before connecting to the power mains, the appliance should be left to stand still in upright position for at least 2 hours.
 Thus, operation errors due to the effect of transport on the cooling system will be much less likely to occur.
- The appliance must be connected to the power mains and grounded in compliance with the effective standards and regulations.
- The appliance may not be used outdoors and should not be exposed to rain.
- The appliance must be disconnected from the power mains (unplug the power cord from the wall outlet) before cleaning or before replacing the bulb.
- If the power cord is damaged, it should be replaced by a service technician or other authorized person.
- If the appliance is not used for a longer period of time, switch it off with the relevant button and disconnect it from the power mains. Empty the appliance, defrost it, clean it, and leave the door ajar.
- To protect the environment, dispose of the appliance after its useful life by taking it to an authorized waste collection center.
- The packaging is made of environment-friendly materials that can be recycled, disposed of, or destroyed without hazard to the environment.
- · Children should not play with the appliance.
- The label with basic information on the appliance is attached in the appliance interior. If the label is not in your local language, replace it with the one supplied with the appliance.


- Warning! Ventilation slots on the appliance or a built-in element must always be clean and unobstructed.
- Warning! Do not use mechanical devices or tools to defrost the refrigerator, nor any other methods except for those recommended by the manufacturer.
- Warning! When installing, cleaning, or removing the appliance, make sure the insulation on the
 refrigeration system parts is not damaged. Thus you will also prevent damage to the environment.
- Warning! Do not use electric appliances in the refrigerator or freezer interior, except for those
 expressly allowed by the refrigerator-freezer manufacturer.

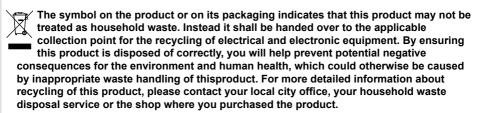

A few tips on how to save power with your refrigerator-freezer combo

- · Observe the installation instructions.
- · Do not open the appliance door more frequently than necessary.
- · Occasionally check whether air can circulate freely behind the appliance.
- Condenser unit mounted on the appliance back wall must be kept clean at all times (see section "Cleaning the appliance").
- If the seal is damaged or loose, replace it as soon as possible.
- Store your food in closed containers or other appropriate packaging.
- Before placing the food in the refrigerator, let it cool down to room temperature.
- · Defrost your frozen food in the refrigerator compartment.
- Remove the freezer drawers and door as described in the instructions, in order to make use of the entire capacity.
- Defrost your conventional freezer when a frost layer approximately 3-5 millimetres thick has accumulated on the surfaces in the freezer compartment.
- Make sure the shelves are evenly distributed and that the food is arranged in a way that
 allows free circulation of air (heed the recommended food arrangement as described in the
 instructions).
- In appliances fitted with a fan, do not block the fan slots.

Appliance description

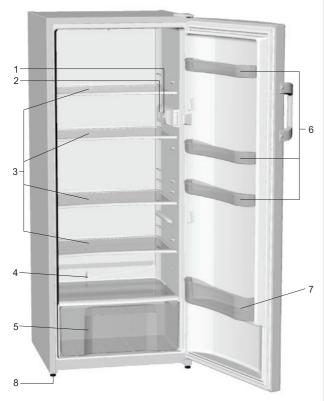

- 1 Control unit
- 2 Interior illumination lamp
- 3 Shelf (height adjustable)
- **4** Water discharge gutter / groove
- 5 Fruit and vegetables bin
- **6** Refrigerator door rack (deep and shallow version, with or without cover)
- 7 Bottle rack
 - 3 Foot

• Appliance interior equipment may change subject to appliance model.


Installation and connection

Selecting the room

 The appliance should be installed in a dry and well ventilated room. The appliance will operate correctly if the environment temperature is within the ranges listed in the table below.
 The appliance class is indicated on the label with the basic information on the appliance.


Class	Ambient temperature
SN (subnormal)	from +10°C to +32°C
N (normal)	from +16°C do +32°C
ST (subtropical)	from +16°C do +38°C
T (tropical)	from +16°C do +43°C

Installing the appliance




Appliance installation should be carried out by at least two persons to avoid any physical injury or damage to the appliance.

 The appliance should stand firmly in an upright position on a sufficiently solid base. At the front, the appliance is fitted with two adjustable legs that can be used to level the appliance.

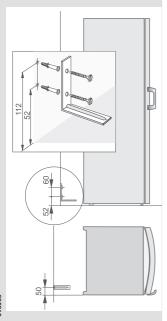

• Since the appliance, especially when the door racks are fully loaded, may tilt forward when the door is opened, it should be secured with a bracket that will prevent tripping. Drill two holes Ø 8 mm into the wall behind the appliance, at the height of 52 and 112 mm from the floor, respectively, and 50 mm from the left side of the appliance, looking from the appliance front side. Insert the dowels into the two holes and use the screws to fix the bracket. Press the appliance against the wall to that the bracket is reaching just above the compressor support.

- If there is a kitchen furniture element above the appliance, there should be a clearance of at least 5 centimeters between this element and the refrigerator, to ensure sufficient cooling of the condenser unit.
- Do not expose the appliance to direct sunlight and do not place it near sources of heat. If this cannot be avoided, install an insulation panel.
- The appliance may stand freely or it can be placed next to a kitchen furniture element or a wall. Mind the space required to open the door and pull out the drawers and shelves (see installation diagram).

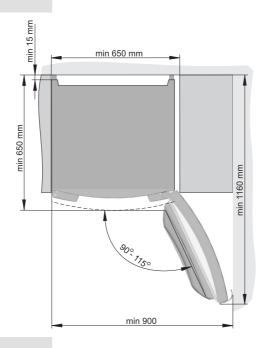

Connecting the appliance


- Use the power cord to connect the appliance to the power mains. The wall outlet should be fitted with a ground contact (safety socket). Nominal voltage and frequency are indicated on the label with basic information on the appliance.
- The appliance should be connected to the power mains and grounded in compliance with the relevant effective standards and regulations. The appliance will withstand short-term deviations from the nominal voltages, but not more than from -6 % to +6%.

Changing the door opening direction

Tools required: socket wrench / spanner Nr. 8, slot and cross screwdriver


- 1. Use the slot screwdriver to remove the covers A and B.
- 2. Undo / remove the hinges (C, E1) and the door (D), starting from the top and working your way down. Make sure the door is not damaged.
- 3. Move the covers (H) to the opposite side.
- 4. **Door (D)**: move the hinges (J) and the cover (M) to the opposite side.
- 5. Start from the bottom and work your way up: attach and secure the lower hinge (E2) supplied in a bag; mount the door (D); and fasten the hinge (C); Do not forget to use the washers, placing them as they were before the door was removed.
- 6. Attach the covers A and B.
- 7. Changing the handle position: remove the covers, undo the screws, and attach the handle to the opposite side. Place the covers on the opposite side. Use the covers supplied in a bag to cover the slot where the handle was initially attached.

Save the hinge E1 in case you need to change the direction of door opening again at a later time.

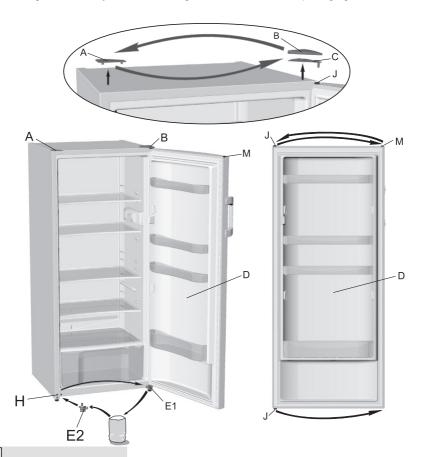


Operating the appliance

Model without fan

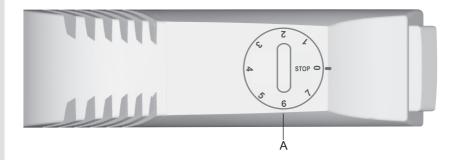


Model with fan

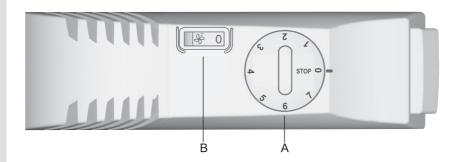


- A Temperature setting and on/off knob
- B Fan on/off switch (only with some models)


Turning the appliance on/off





Turn on: rotate the thermostat knob clockwise towards position 7.



Fan (only with some models)







Turn off: rotate the knob back to position STOP (0).

Setting the temperature

- Higher settings (towards 7) selected with the knob correspond to lower (cooler) temperatures. The temperature in the refrigerator interior may drop below 0°C. Only use higher settings when a lower temperature is desired and recommended or when environment temperature is lower than 16°C. When the environment temperature is normal, a medium setting is recommended.
- A change in the environment temperature affects the temperature in the appliance. Hence, the thermostat setting should be adjusted accordingly.
- When the thermostat knob is set to position STOP (0), the appliance will not operate (cooling system is off); however, the appliance is still powered (a light will illuminate the interior when the refrigerator door is opened).
- The fan distributes the cool air in the refrigerator more evenly, speeds up the cooling process, and reduces accumulation of dew on the shelves. It only operates when the compressor is in operation.
- Switching on the fan is recommended as an additional function in the following cases:
 - when room temperature rises (above 30°C),
 - in case of higher humidity or when droplets of dew start to accumulate on the shelves,
 - when inserting larger quantities of food (rapid cooling).
- · Switching the fan on and off

Switch on = $\frac{1}{2}$ Switch off = 0

Warning: When the fan is switched on, power consumption increases and the temperature in the refrigerator drops. Hence, it is recommended to reset the temperature in the appliance interior.

- · Recommended settings:
 - when fan is activated: position 1-4,
 - without the fan: position 4-7.

Temperature setting for the refrigerator compartment also indirectly affects the temperature in the freezer compartment.

Storing food in the refrigerator

Important warnings on food storage

Appropriate use of the appliance, appropriate food packaging, maintaining the appropriate temperature and observing the hygienic guidelines will affect decisively the quality of food storage.

⚠ Observe the best before dates indicated on the product packaging.

Food stored in the refrigerator should be placed in closed containers or otherwise suitably packed to prevent emitting scent and moisture.

Do not store inflammable, volatile, and explosive substances in the refrigerator.

Bottles with high alcohol content should be tightly sealed and stored in an upright position.

Some organic solutions, essential oils in lemon and orange peel, butter acid, etc. may damage the plastic surfaces in case of a prolonged contact, causing premature ageing of these materials.

Unpleasant smell warns of poor appliance cleanliness or deteriorated food (see Cleaning and Maintenance).

Remove perishables from the refrigerator before a longer period of absence from home.

Refrigerator interior equipment



The equipment depends on the models.

- The shelves can be inserted to any of the shelf guides in the refrigerator interior. They are protected against pulling out.
 To remove a shelf from the refrigerator, lift is slightly at the front, tilt as required, and pull it out. Food that perishes quickly should be kept at the back of the shelf where the temperatures are lower.
- Certain models are equipped with wire bottle rack which enables placing of bottles on the cork. It is safeguarded against pulling out. It may be pulled out only if empty, by lifting the front part and pulling it towards you. Place the bottle rack in the appliance in such way to avoid obstruction of door closing by the length of the stacked bottles.

Maximum load of the rack is 9 bottles of 0,75 l, or 13 kg of total mass - see label at the right side of the interior of the ppliance.

 The bin / drawer at the bottom of the refrigerator compartment, under the glass shelf, is intended for storing fruit and vegetables. It provides humidity, thus preventing the food from dehydrating. The food must be appropriately packaged in order to prevent emitting or receiving smell and moisture. Interior side of the refrigerator door is fitted with racks and bins intended for storing cheese, butter, eggs, yoghurt, and other smaller packages, tubes, cans, etc. The lower part of the door is fitted with a bottle rack.

Food storage time

Recommended storage time for the refrigerator

Foodsmoked	Time
eggs, marinated meat, smoked meat	up to 10 days
cheese	up to 10 days
root vegetables	up to 8 days
butter	up to 7 days
deserts, fruit, ready-to-eat dishes, raw meat chunks	up to 2 days
fish, raw chopped meat, seafood	up to 1 day

Storage of food in the FreshZone



The **FreshZone** drawer provides storage of wide selection of fresh food **longer than in the traditional refrigerator.** Food remains fresh for long time and it preserves its taste and nutritive ingredients. It reduces decay and loss of mass, so fruit and vegetables are more fresh and natural. The drawer must be tightly closed to provide optimum operation.

- Moisture level in the drawer depends upon the moisture of stored food, and on the frequency of opening the drawer.
- When you buy food check its freshness: quality and durability of food depends on it.
- Store non-wrapped animal or vegetable food separately, or wrap it in suitable packages. Be careful to prevent touching of different types of meat. They should be packed and stored separately to avoid bacterial decomposition in case meat turns foul.
- Approximately 30-60 minutes prior use remove food from the drawer to let its aroma and taste develop at ambient temperature.
- Food sensitive to low temperatures is not suitable for storage in the FreshZone drawer: pineapple, avocado, bananas, olives, potato, eggplant, cucumber, beans, bell pepper, melons, water melons, pumpkins,...

Defrosting the appliance

Automatic refrigerator defrosting

The refrigerator does not require defrosting, as ice accumulated on the back wall of the refrigerator compartment interior is melted automatically.

The accumulated ice is thawed when the compressor is not operating. The drops will drip through the opening in the refrigerator back wall into a container above the compressor, from where they will evaporate.

If an excessive layer of ice is accumulated on the refrigerator back wall (3-5 mm), the appliance should be disconnected and defrosted manually.

Cleaning the appliance

Before cleaning, disconnect the appliance from the power mains - rotate the thermostat knob A to the STOP (0) position and unplug the power cord from the wall outlet.

 Use a soft cloth to clean all surfaces. Cleaners containing abrasive particles, acids, or solvents, are not appropriate as they will damage the surface.

Clean the **appliance exterior** with water or a mild solution of suds.


Lacquer-coated and aluminum surfaces can be cleaned with lukewarm water to which some mild detergent was added. Cleaning agents with minor alcohol content are also acceptable (e.g. window cleaners).

Cleaners with alcohol content are not allowed for cleaning plastic parts.


Clean the appliance **interior** with lukewarm water to which you may add some **vinegar**.



 Placed under the cooling board that cools the refrigerator interior are a trough (groove) and an opening through which melted water is discharged from the appliance interior. The through and the opening should never be blocked; therefore, check them often and clean as required (e.g. using a plastic straw).



 Condenser unit on the back of the refrigerator should always be kept clean, free of dust or deposit from kitchen smoke. Use a soft non-metal brush or a vacuum cleaner to clean the dust periodically.



- Also clean the container above the refrigerator compressor. If it was removed for cleaning, replace it afterwards. Make sure the container is in a horizontal position!
- After cleaning, switch on the appliance and put the food back in.

Troubleshooting

Problem:	Cause or remedy:
After connecting to the power mains, the appliance does not operate:	Preverite, če je v vtičnici napetost, in če je aparat vklopljen.
Cooling system has been working continuously for a long period of time:	Too high environment temperature.
	Door is open too often or it is left open too long.
	Door is not closed appropriately (there may be dirt between the door and the refrigerator, the door may be tilted, the seal should be checked, etc.).
	Too much fresh food was inserted.
	The sensor in the refrigerator (A) is blocked by fresh food. Make sure the air can circulate around the sensor (only with some models).
	Insufficient compressor and condenser cooling. Check the air circulation behind the appliance and clean the condenser.
Excessive build-up of ice on the	Door is opened to often or it is left open too long.
back wall of refrigerator interior	Warm food was placed in the refrigerator.
may result form the following:	Food or a container are in contact with the refrigerator interior back wall.
	Poor door sealing. If the seal is dirty or damaged, clean it or replace it.
Water is dripping from the refrigerator:	Blocked water discharge opening; or water from thawed ice is dripping past the water collection trough.
	Clean the blocked opening, e.g. using a plastic straw.
	If the layer of ice is too thick, defrost the appliance annually (see "Defrosting the appliance").
Replacing the bulb:	Before replacing the bulb, disconnect the appliance from the power mains (unplug the power cord from the wall outlet / socket). Insert a screwdriver into the slot in the cover, lift it and remove it. Replace the bulb with a new one (E14, same power rating as the one provided by the manufacturer) and replace the cover.
COLUMN	Do not dispose of the blown bulb with organic waste.
	The bulb is considered a consumable and is excluded from any warranty!

If none of the above reasons seems to match your problem, please contact the nearest service center and state the type, model and serial number as indicated on the label with basic information attached in the appliance interior.

Information on appliance noise

Cooling in the refrigerators-freezers is enabled by a cooling system with a compressor (with some appliances also a fan), which emits a certain level of noise during operation. The level of noise depends on installation, proper use, and appliance age.

- After appliance startup, the compressor may be somewhat louder (fluid noise, noise caused by refrigerant flowing through the system). This is not a sign of malfunction and it will not affect the appliance useful life. Eventually, the level of this noise will be reduced.
- Occasionally, sudden or louder noise may appear during appliance operation, which will
 appear uncommon; these are mostly the result of improper installation:
 - The appliance must be placed horizontally and firmly on a solid base.
 - The appliance should not be in contact with the wall or adjacent elements.
 - Make sure the appliance interior equipment is appropriately fitted and that the noise is not caused by vibrating cans, bottles, or other containers in contact with each other.

WE RESERVE THE RIGHT TO CHANGES THAT TO NOT AFFECT THE APPLIANCE FUNCTIONALITY.



COOLER HS3167