

TRANSLATION OF THE ORIGINAL INSTRUCTIONS

SUMMARY

1	PRODUCT IDENTIFICATION	3
1.1	APPLICATION, GENERAL FUNCTIONS AND INTENDED USE	3
1.2	NAME AND ADDRESS OF MANUFACTURER OR DISTRIBUTOR	3
1.3	DECLARATION OF CONFORMITY TO PRODUCT STANDARDS	3
1.4	DESCRIPTION OF THE APPLIANCE	4
2	SYMBOLS USED IN THE MANUAL	4
3	SAFETY PRECAUTIONS AND INSTRUCTIONS	5
3.1	CORRECT INSTALLATION	5
3.2	SAFE USE	6
3.3	CORRECT MAINTENANCE	6
4	PRODUCT CHARACTERISTICS	7
4.1	OVERALL DIMENSIONS (L 488)	7
4.2	OVERALL DIMENSIONS (L 460)	8
4.3	TECHNICAL CHARACTERISTICS	9
5	PREPARING THE APPLIANCE FOR USE	10
5.1	POSITIONING AND INSTALLATION	10
5.2	CONNECTION TO THE WATER SUPPLY	11
5.3	DRAIN CONNECTION	11
5.4	CONNECTION TO THE ELECTRICITY SUPPLY	12
6	FIRST START-UP	13
6.1	FIRST START-UP	13
6.2	PREPARING FOR USE (IMPORTANT)	13
6.3	USING THE WATER SOFTENER (ON MODELS WITH THIS FEATURE ONLY)	13
6.4	SWITCHING ON	14
7	CONTROL ICON DISPLAY (SET-UP INFORMATION)	15
7.1	SET-UP (AUTHORISED STAFF ONLY)	16
7.2	MODIFIABLE PARAMETERS	17
7.3	STARTING THE PERISTALTIC PUMPS – RAPID FILLING OF DETERGENT AND RINSE AID DELIVERY CIRCUIT	20
8	MALFUNCTIONS SHOWN ON THE DISPLAY (FOR THE TECHNICIAN)	21
9	INSTRUCTIONS FOR THE USER	23
9.1	BEFORE WASHING	24
9.2	FIRST USE EACH DAY (TANK AND BOILER EMPTY)	25
9.3	OPERATING ANOMALIES	26
9.4	PROGRAM CHANGE	26
10	CHOSING THE PROGRAM	27
11	BASKETS PROVIDED	28
12	MAINTENANCE AN CLEANING	29
12.1	TOTAL PUMP-OUT AT THE END OF THE DAY	30
12.2	TOPPING UP WITH REGENERATING SALT (FOR MODELS WITH SOFTENER)	30
12.3	ROUTINE INSPECTION OF THE SPRAY ARM (ONCE A WEEK)	31
12.4	LENGTHY PERIODS OUT OF USE	31
13	TROUBLESHOOTING	32
14	MALFUNCTIONS SHOWN ON THE DISPLAY (FOR THE USER)	34

SMEG thanks you for choosing one of its products.

This manual is an integral part of the appliance. Take good care of it and keep it to hand throughout the appliance's life cycle, since it contains important information about assembly, safety, use and maintenance.

In the event that the appliance is sold on, consign this manual to the new owner.

Before putting the appliance into operation, read all the instructions in this manual carefully to become familiar with the right conditions for the proper use of your professional dishwasher.

1 PRODUCT IDENTIFICATION

1.1 Application, general functions and intended use

This dishwasher is intended for professional use in the restaurant and institutional catering sector and complies with the relevant safety regulations. However, misuse may cause injury and/or damage, and therefore the dishwasher must only be used by suitably trained staff.

This dishwasher is designed for use in non-mobile premises and is intended only for washing tableware (dishes, pans, trays, cups, glasses and bowls) and any other item for commercial catering, stable to temperature and humidity produced by the appliance". Any other type of use is not permitted and may be dangerous.

Persons whose physical, sensory or mental capabilities, inexperience or lack of knowledge render them unable to use the dishwasher safely must not use it without the supervision and guidance of a responsible person.

The manufacturer is not liable for any injury or damage caused by failure to comply with the instructions given in this manual, misuse, tampering with even a single part of the appliance, or the use of non-genuine spare parts.

1.2 Name and address of manufacturer or distributor

Smeg S.p.A.

Via Leonardo da Vinci, 4 - 42016 Guastalla (RE) Tel. +39 0522 8211 - Fax + 39 0522 821453

Internet: www.smegfoodservice.com, email: foodservice@smeg.it

Our Sales Department staff will be able to provide you with information about prices and special offers.

Our After-Sales Department will be able to provide you with guidance about keeping your device functioning correctly and put you in touch with your nearest authorised Service Centre. Our entire product offering can be viewed at our website.

1.3 Declaration of conformity to product standards

This appliance complies with the relevant safety regulations and conforms to the requirements of directives 2006/42/EC and 2004/108/EC.

The dishwasher is also marked in compliance with European Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).



For information on the treatment, recovery and recycling of this product, contact the local authority, domestic waste collection service, or your Smeg reseller.

Make sure that this product is scrapped correctly to safeguard the environment and health.

1.4 Description of the appliance

U	COVER (TOP)	
D	DISPLAY AND CONTROL PANEL	
A	FRONT LOADING/UNLOADING DOOR	
V	SERVICE COMPARTMENT	
F	ADJUSTABLE FEET	

2 SYMBOLS USED IN THE MANUAL

	This symbol instructs the user to read the instructions in the manual with care.
	This symbol appears next to information important for the safety of people and the appliance.
	This symbol is applied to some parts which contain live electrical components and indicates the risk of electric shock.
	This symbol is applied close to the terminal for the connection of an external equipotential conductor.
	This symbol appears next to important information. Read the instructions provided with care and comply with the procedures and rules described.
	This symbol appears next to information and technical instructions intended for the qualified staff who are to install, commission and test the appliance and carry out any repairs.
	This symbol indicates that at the end of its working life, the appliance must be consigned to a disposal plant for recovery and recycling in accordance with the relevant legislation in the country of installation. Contact a specialist centre for disposal.

3 SAFETY PRECAUTIONS AND INSTRUCTIONS

The precautions and instructions below contain important information and must be read with care. The manufacturer does not accept responsibility for damage caused by failure to comply with the safety precautions and instructions.

3.1 Correct installation

- The dishwasher must be installed by an authorised technician.
- When handling and installing the dishwasher, always wear the most suitable personal protection equipment (PPE) for the task in hand.
- Do not install a dishwasher which has been damaged during transport. If in doubt, consult your dealer.
- If the power supply cable is damaged, do not run the dishwasher.
- Do not install the dishwasher in areas subject to freezing temperatures or in atmospheres with explosion risk (ATEX).
- Any accessories may only be installed on the appliance if authorised by the manufacturer.
- Do not install the dishwasher next to appliances which irradiate strong heat (e.g. gas burners, stoves, etc.) since they could cause damage.
- If the dishwasher is installed above the ground, make sure that the stand and dishwasher are secured properly and do not constitute a hazard.
- Electrical safety is only ensured if the dishwasher is connected to an earth conductor compliant with the relevant electrical regulations. If in doubt, have the system inspected by a qualified electrician.
- A circuit breaker and overcurrent protection device (magnetothermal switch or fuses) must be installed in an easily accessible position on the dishwasher's power supply line. This device must only serve the dishwasher and must be suitable for its rated electrical characteristics.
- Do not connect the dishwasher to the electrical mains by means of adapters or extensions, since they do not guarantee the safety required.
- If the dishwasher is connected to the electrical mains by means of a plug, it must be of the same type as the power socket, suitable for the appliance's rated electrical characteristics and compliant with the relevant national regulations on electrical systems. The power plug must be easily accessible after the appliance has been installed.
- Only use new hoses for connection to the water supply. Old hoses or hoses salvaged from previous installations must not be used.
- The drain connection must be made in accordance with the relevant national regulations. Substandard connections may cause flowback and in some cases pollution.
- If the machine is not installed in a recess, the FSG-PRF kit code 917839 should be used to make it stable.

3.2 Safe use


- The staff assigned to use the dishwasher must be suitably trained and instructed.
- The appliance is not suitable for use by juveniles or persons with reduced physical, sensorial or mental capacities, or those without the necessary knowledge and experience. Such persons may only use the appliance under the supervision of a person responsible for their safety.
- Do not leave the dishwasher door open. Risk of tripping or injury against the edges of the door.
- Do not sit or lean on the open door. This may tip over or damage the appliance.
- The water inside the dishwasher is not drinkable.
- Do not use the dishwasher for washing or soaking foods.
- Do not use the water inside the dishwasher for defrosting foods, even if they are in airtight containers.
- When using the dishwasher, remember that the plates are very hot at the end of a wash cycle.
- When the door is opened, splashed of hot water may come out.
- Knives and pointed kitchen equipment must be placed in the basket with their tips downwards, or horizontally, taking care not to allow them to protrude from the basket
- The dishwasher is only intended for use with water and detergents suitable for washing in professional dishwashers. The use of other products may damage both the dishes and the appliance.
- Do not operate the dishwasher with organic solvents or flammable liquids. Never load dishes dirty with ash, wax or paint.
- When handling detergents comply strictly with the instructions provided by the detergent producer.
- Always keep the detergent safety datasheets within reach so that the operator can consult them easily if necessary.
- Swallowing or inhaling detergents may cause serious injury to the nose, mouth and throat. If detergent has been inhaled or swallowed, seek medical advice immediately.

3.3 Correct maintenance


- Do not clean the machine with a water jet machine, high-pressure or steam cleaners.
- Before performing any maintenance procedure on the appliance disconnect it from the mains electricity supply. Touching live electrical components, even accidentally, may be very dangerous.
- Never open the dishwasher's case. Electric shock hazard. Only the authorised technician may access the internal parts of the dishwasher.
- The dishwasher may only be repaired by the authorised service organisation. Substandard repairs may cause damage or danger for the user.
- No alterations or changes of any kind to the appliance's electrical circuits or mechanical structure are permitted. The manufacturer declines all responsibility for damage arising from unauthorised alterations.
- Replace any faulty parts only with genuine spare parts. The manufacturer declines all liability for damage resulting from the use of non-genuine spare parts.
- The power supply cable, if fitted, must be replaced by the manufacturer or an authorised service centre in accordance with the technical data specified on the wiring diagram supplied with the appliance, to prevent all risks.

4 PRODUCT CHARACTERISTICS


4.1 Overall dimensions (L 488)

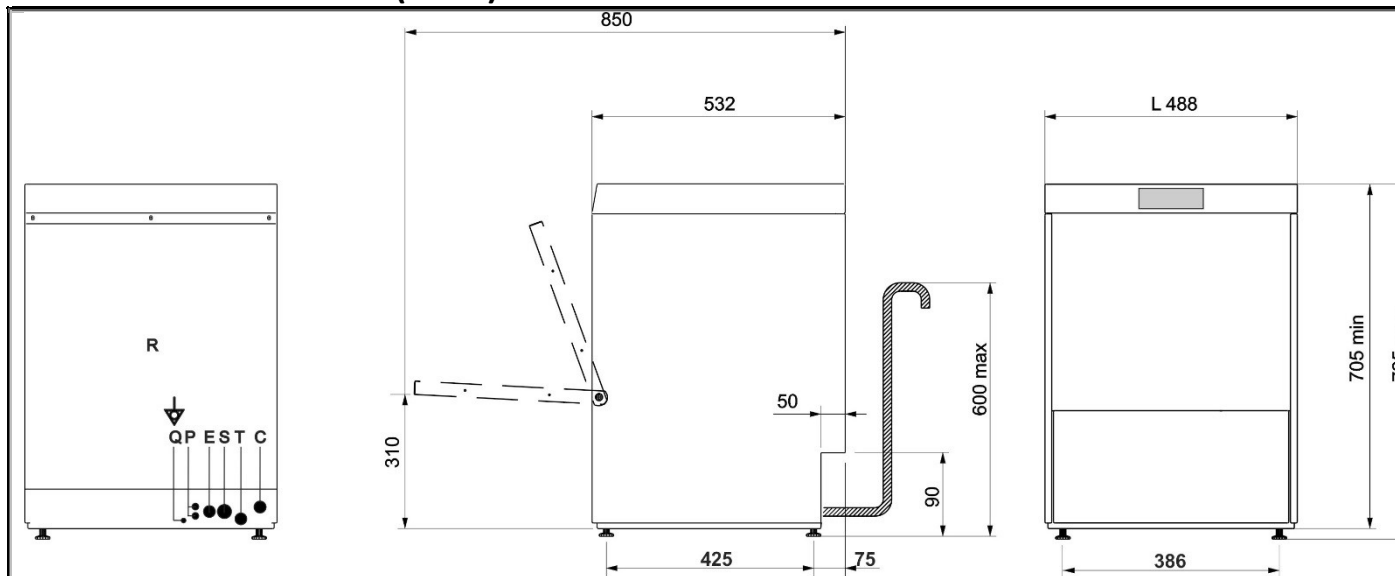


R	LOWER BACK PANEL	E	ELECTRICITY SUPPLY CABLE
C	FILLER HOSE	P	PERISTALTIC HOSES
Q	EARTH TERMINAL	S	DRAIN HOSE
T	EXTERNAL DISPENSER POWER CABLE ENTRY POINT		

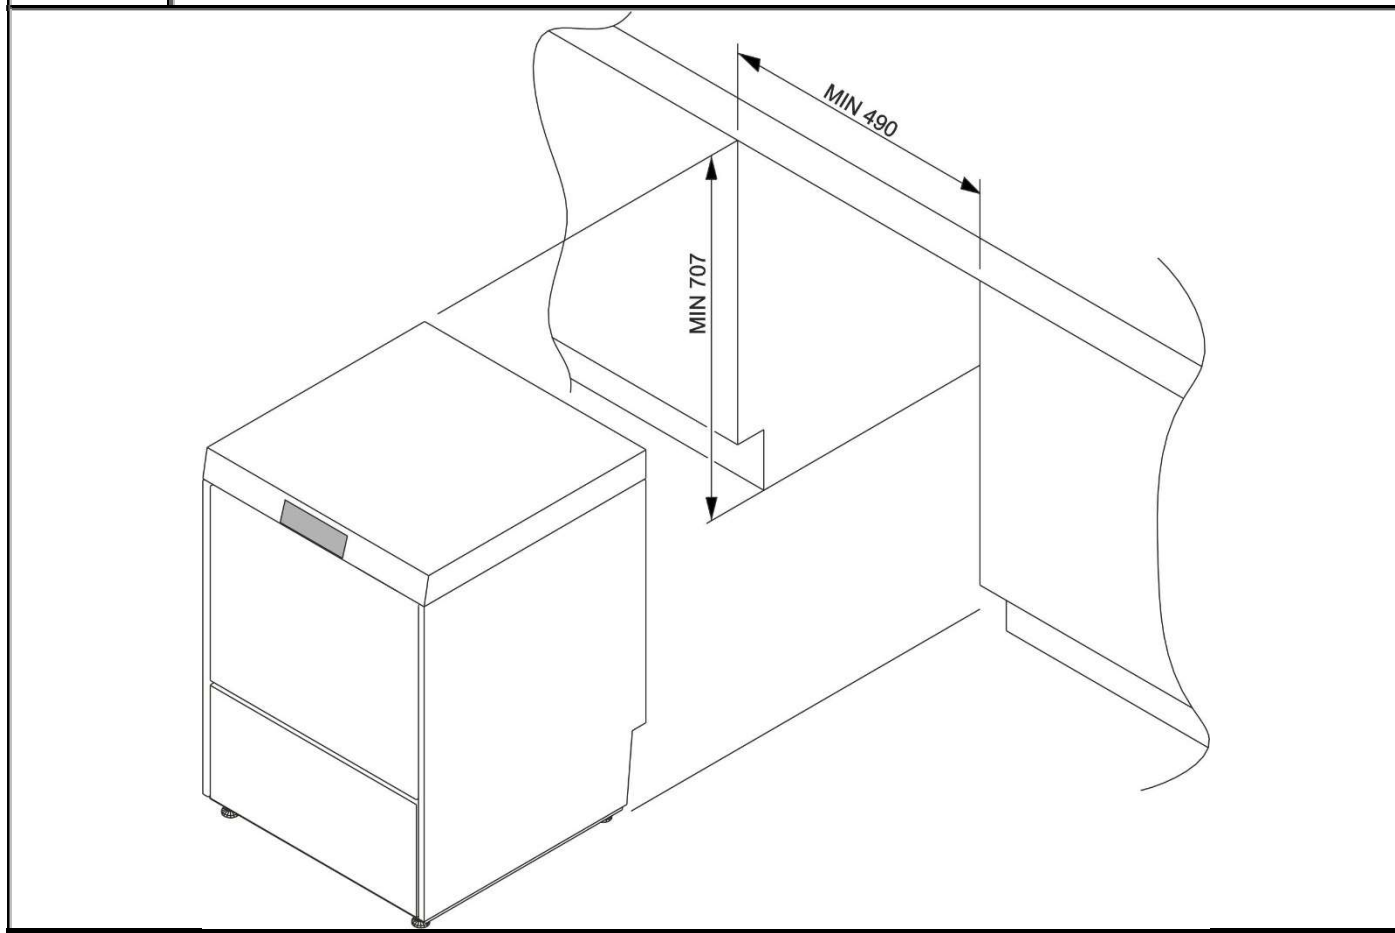

4.2 Overall dimensions (L 460)

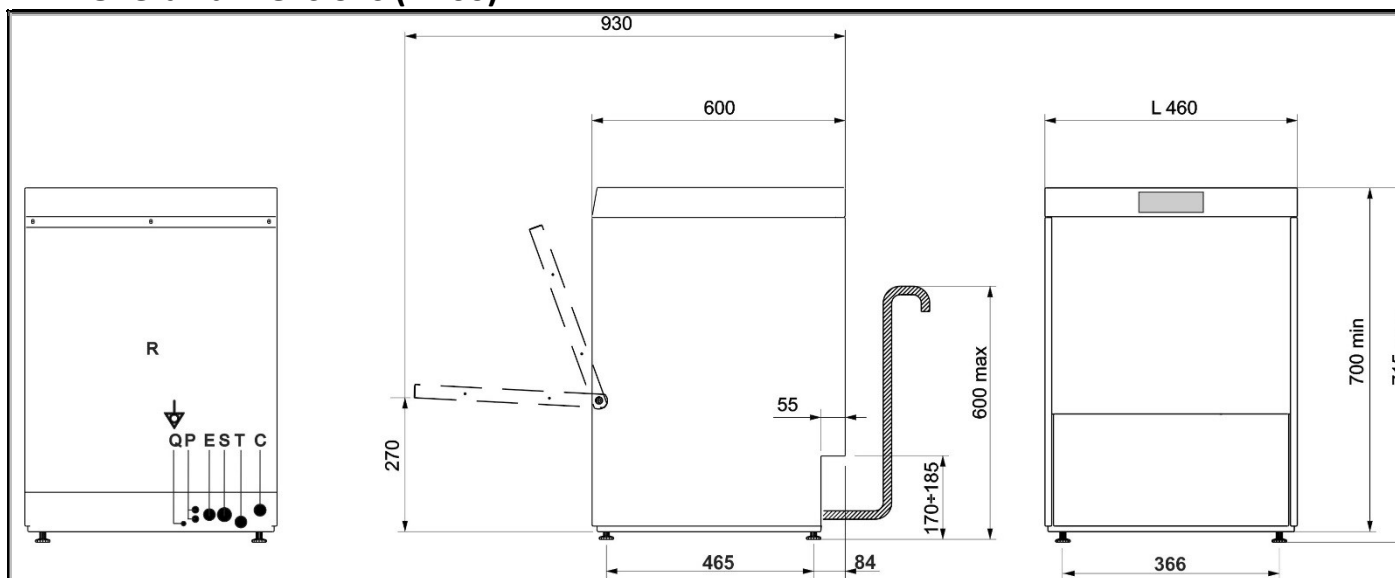

R	LOWER BACK PANEL	E	ELECTRICITY SUPPLY CABLE
C	FILLER HOSE	P	PERISTALTIC HOSES
Q↓	EARTH TERMINAL	S	DRAIN HOSE
T	EXTERNAL DISPENSER POWER CABLE ENTRY POINT		

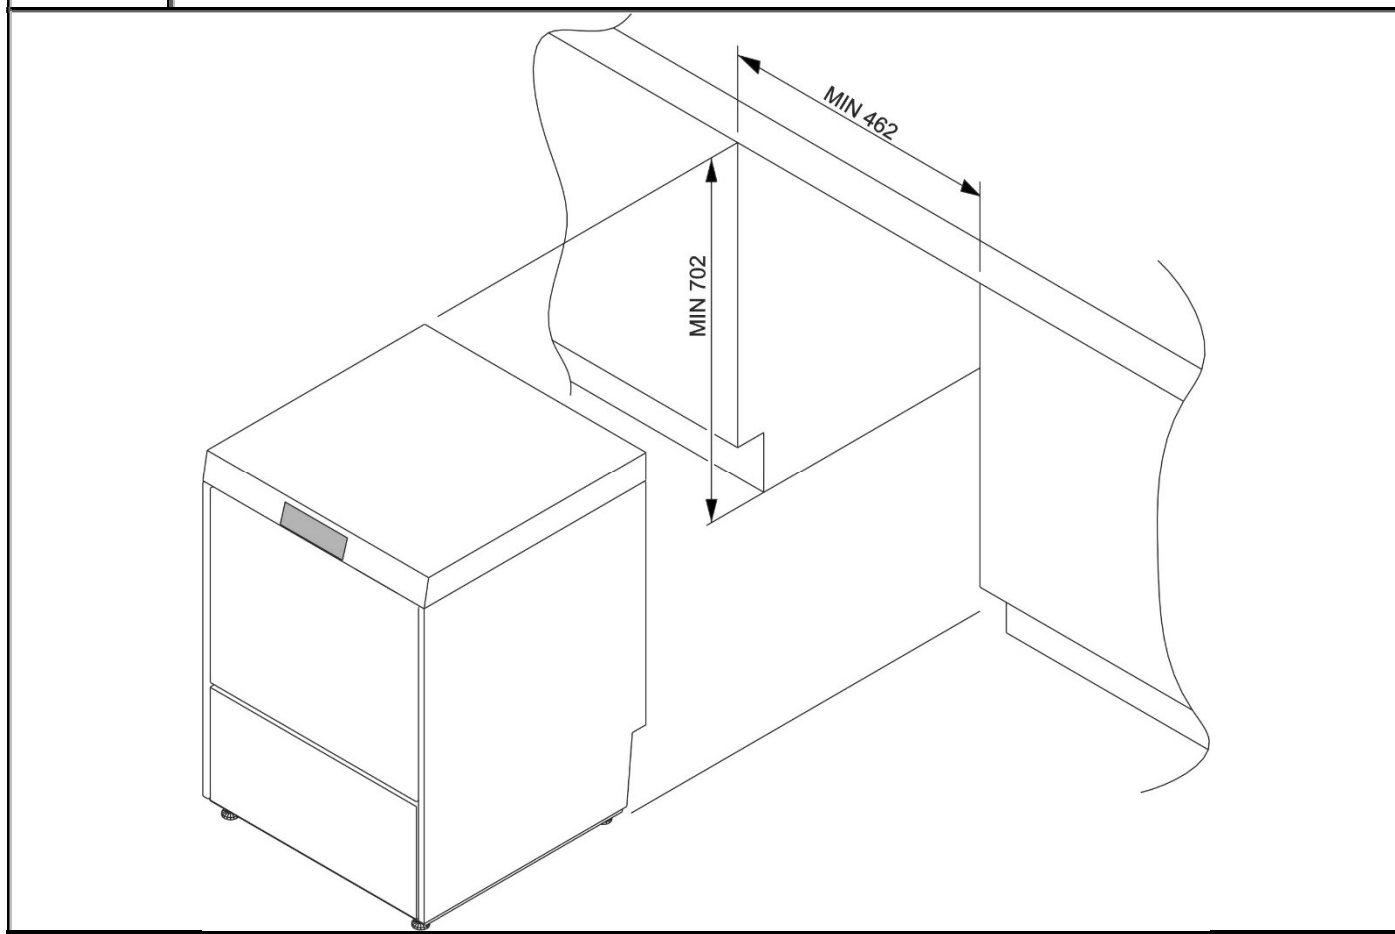

4.3 Technical characteristics

Electricity supply	-	See technical data plate and electrical wiring diagram supplied with the appliance
Intake water pressure	-	
Intake water temperature	-	
Use	-	Indoor
Max. working altitude	m	2000
Working ambient temperature	°C	10 - 35
Relative humidity		80% for temperatures up to 25°C with linear decrease to 50% at the temperature of 35°C
Intake water hardness (models with softener)	°f	≤ 60
Intake water hardness (models without softener)	°f	≤ 15
Water intake flow rate (models with rinsing pump)	L/min	min 6
Water intake flow rate (models without rinsing pump)	L/min	min 12
Intake hose connection	-	threaded 3/4 "
Drain minimum diameter	mm	25
Drain height (above appliance installation surface)	mm	max 600
Rinse cycle water consumption	L	2.3
Boiler capacity	L	4
Tank capacity	L	8
Noise level	LpA	< 60 dB(A)
Degree of protection	IPX	4
Net weight	kg	~ 42
Power supply cable type	◀HAR▶	H07RN-F

5 PREPARING THE APPLIANCE FOR USE

Convey the dishwasher to the installation site, remove the packaging and check the appliance and components for damage; any damage found must be reported to the transporter in writing. The packaging components (plastic bags, expanded polystyrene, nails, etc.) must not be left within reach of children and pets since they are potentially dangerous. All packaging materials used are environment-friendly. They can be kept without constituting any hazard, or may be disposed of at a specialist waste disposal centre. The plastic components suitable for recycling are marked as follows:

PE - polyethylene: external packaging film, bag containing the instructions, protective bags.

PP - polypropylene: straps used to close the packaging.

PS - expanded polystyrene: corner guards, top of packaging.

Wooden and cardboard components can be disposed of in accordance with the local regulations.



All operations described in this section must be carried out and/or checked by the qualified staff who install and commission the dishwasher.

5.1 Positioning and installation

Place the dishwasher in the chosen point and remove the protective film. Level the dishwasher (with the aid of a spirit level) on its four feet, adjusting them to ensure that it is stable. If the dishwasher is installed above the ground, make sure that the stand and dishwasher are secured properly and do not constitute a hazard.



The systems and premises in which the dishwasher is installed must comply with the relevant regulations.




If the dishwasher is installed next to another appliance, also check the recommendations provided by the manufacturer of the adjacent appliance.



Installations other than those described must first be approved by the manufacturer.




Use only professional furnishings and units in the vicinity of the dishwasher. Any other types of furnishing may be damaged.

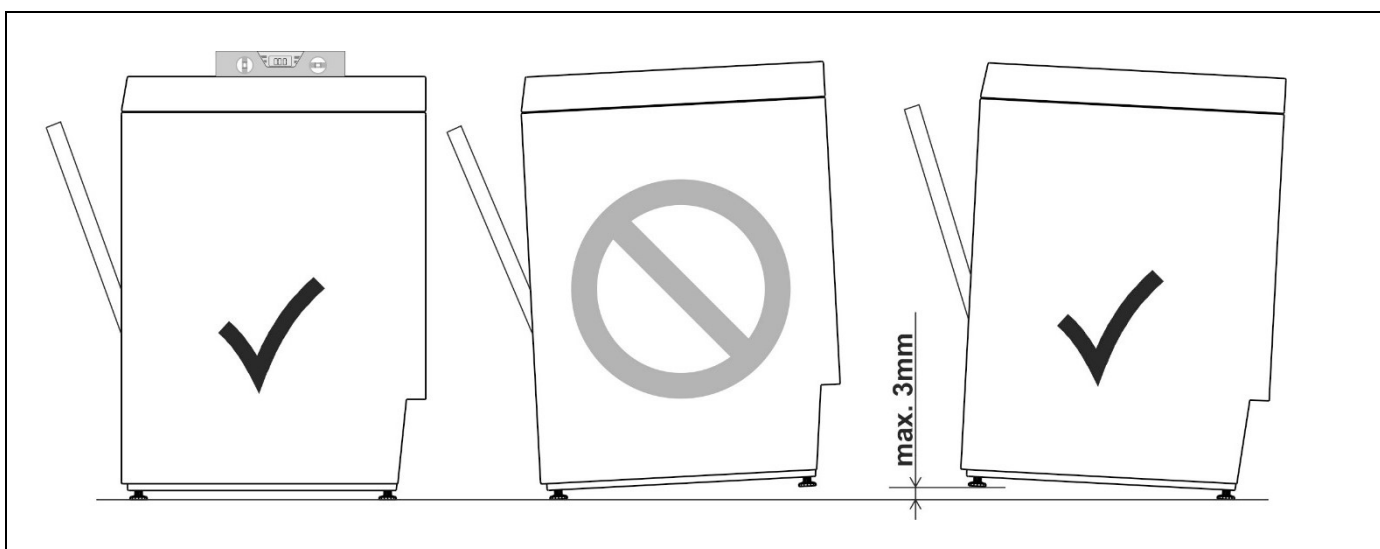

5.2 Connection to the water supply

Check that the intake water pressure, flow rate and temperature are as stated in the dishwasher's technical characteristics. If the dynamic pressure exceeds the limit stated in technical characteristics, a pressure reducer must be installed. If the pressure is lower, it might be necessary to fit a special pump to ensure optimal performance. Connect the water intake hose to a connector with $\frac{3}{4}$ " gas threaded fitting, inserting the filter "A" provided. The tap must be easily accessible after installation of the appliance.



the
is



Only use new hoses for connection to the water supply. Old hoses or hoses salvaged from previous installations must not be used.



If the water supply system has been unused for a long time or if work has been done on it, before connecting the appliance's intake hose run the water to flush the air and dirt from the pipes.



To run the beer cycle, only present on some models (see programs table), a cold water supply is required. This increases the washing times for all programs.



FOR MODELS WITH A WATER SOFTENER

An "approved" double check valve or some other no less effective device providing backflow prevention protection to at least fluid category two shall be fitted at the point of connection between the water supply and the fitting or appliance.

FOR MODELS WITHOUT A WATER SOFTENER

An "approved" single check valve or some other no less effective device providing backflow prevention protection to at least fluid category two shall be fitted at the point of connection between the water supply and the fitting or appliance.

5.3 Drain connection

The dishwasher is fitted with a drain pump and can operate with drain connections on the floor or wall. Before connecting the hose, check that the diameter and height of the wall drain connection are as stated in the dishwasher's technical characteristics. When connecting the dishwasher's drain hose, take care to avoid kinks, sharp bends or crushing. Since the drain water temperature can be very high, the end of the drain hose must be fixed to the drain connection using the hose clamps provided.



The drain connection must be made in accordance with the relevant national regulations. Substandard connections may cause flowback and in some cases pollution.



No extensions must be added to the drain hose supplied with the appliance. Any extensions might cause drainage problems.

5.4 Connection to the electricity supply

The dishwasher must be connected to the electrical system by authorised, skilled staff, in accordance with the relevant regulations. Also comply with the technical instructions for the connection provided with the appliance. The dishwasher's rated electrical characteristics are provided on its technical data plate. A circuit breaker with contact gap rated for category II overvoltage and an overcurrent protection device (magnetothermal switch or fuses) must be installed in an easily accessible position on the dishwasher's power supply line. These devices must only serve the dishwasher and must be suitable for its rated electrical characteristics. The electrical protection devices must undergo a functional test before the dishwasher is put into operation. If the dishwasher is connected to the electrical mains by means of a plug, it must be of the same type as the power socket, suitable for the appliance's rated electrical characteristics and compliant with the relevant national regulations. The power plug must be easily accessible after the appliance has been installed.



Electrical safety is only ensured if the dishwasher is connected to an earth conductor compliant with the relevant electrical regulations. If in doubt, have the system inspected by a qualified electrician.



Do not connect the dishwasher to the electrical mains by means of adapters or extensions, since they may cause dangerous overheating.



Connect the appliance to the equipotential bonding system. The equipotential terminal is low down on the back of the appliance and is marked with the ⚡ symbol.



The dishwasher is always powered up unless the master switch is turned off or, on appliances with power plug, the plug is disconnected.

6 FIRST START-UP


6.1 First start-up

The electrical protection system must undergo a functional test before the appliance is put into operation. The appliance must be installed and/or inspected by qualified staff, who will start it up for the first time and provide the relevant operating instructions.

6.2 Preparing for use (Important)

The rinse aid dispenser is fitted on all models, the detergent dispenser only on some.

If both dispensers are present put the external detergent and rinse aid containers in place and insert the respective intake hoses on the rear of the appliance into them. Red hose: detergent, blue hose: rinse aid.



Before inserting the hoses into the containers, fit the weights (needed to ensure that they always draw in liquid from the bottoms of the containers) and the filters onto their ends as shown. If the detergent dispenser is not factory-fitted, it can be retrofitted after ordering the relative kit.



Whenever the type of detergent or rinse aid is changed, it is **ABSOLUTELY ESSENTIAL** to flush out the peristaltic pumps by placing the external intake pipes in water for a few cycles. Always use only products specifically recommended for use in a professional dishwasher. Failure to comply with this recommendation leads to **forfeiture of the warranty** entitlement on the appliance's water system. Replacement of the **internal tube** of the detergent and rinse aid peristaltic pumps is **recommended every 12 months or 15.000 wash cycles**, by the After-Sales Service.

6.3 Using the water softener (on models with this feature only)



The quantity of lime in the water (which indicates its hardness) causes whitish marks on dry dishes and dishes also tend to lose their shine over time. The dishwasher is equipped with an automatic water softener which removes the substances that cause hardness from the water with the aid of regenerating salt.










The first time the dishwasher is used, a litre of water must be poured into the tank with the salt. Whenever the tank is filled, always take care to ensure that the cap is firmly closed. The mixture of water and detergent must not get into the salt tank, as this would impair operation of the regeneration system. In this case warranty cover will be forfeited.

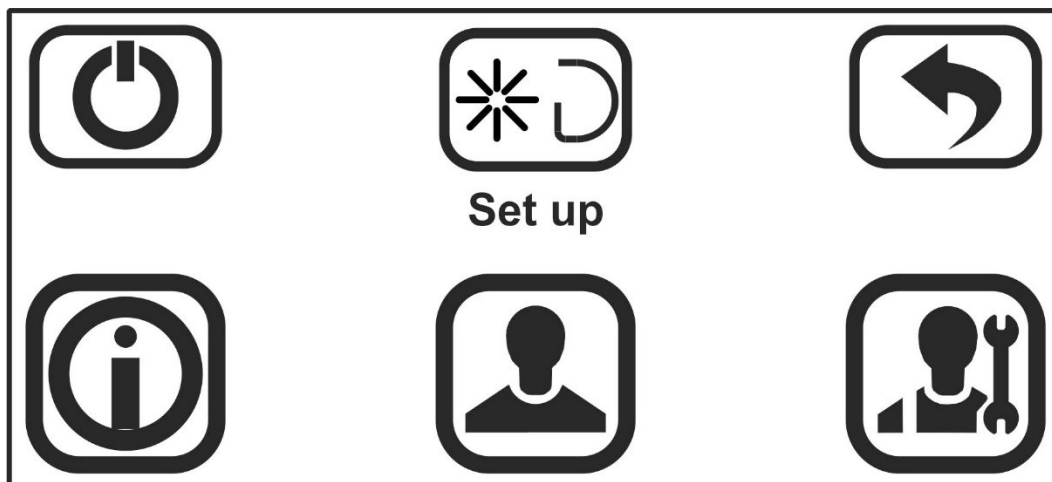6.4 Switching on

	<p>When the control panel is switched on, smeg appears on the screen</p>
	<p>The ON-OFF button then displays in red. Press to switch on; the ON-OFF button turns green.</p>
	<p>Screen displayed for a few seconds</p>
	<p>With this screen displayed, press to display the boiler and tank temperatures.</p>
	<p>On completion of the preparation phase, the screen shows "Cycle end". Touch any icon or open/close the door and the dishwasher will be ready for use or set-up.</p>
	<p>Press to access the set-up.</p>

7 CONTROL ICON DISPLAY (set-up information)



	ON-OFF-QUIT SETUP MENU
	PERISTALTIC PUMPS ON
	BACK TO PREVIOUS LEVEL
	INFORMATION MENU ICON: displays a set of information about the appliance's operating status and use.
	SET-UP MENU ICON
	TECHNICAL SET-UP MENU ICON (access with password)

7.1 SET-UP (Authorised staff only)



Set-up

During first start-up, the functions/parameters listed below must be set or adjusted:



Options and parameters are confirmed "automatically" when the user moves on to the next item or quits the menu (press).




Press to scroll through the options available.



Press to move on to the next item.

Press to access the set-up menu

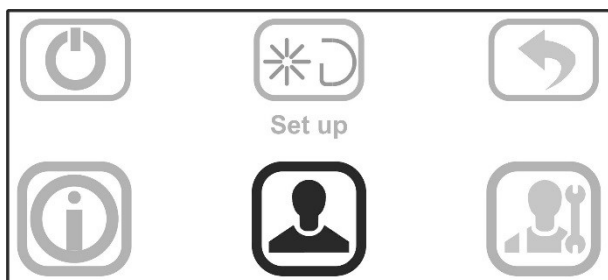

Press to scroll through the languages available



Press to modify the parameter or to move on to the next item.

7.2 Modifiable parameters

The illustrations are purely guideline. The minimum and maximum temperatures available depend on the model (glass washer, dishwasher, undercounter or hood-type model, ..).

Rinsing temperature (boiler temperature)

Rinse Temperature

°boi 85°C

↓

➔

Washing temperature (tank temperature)

Wash temperature

°tan 60°C

↓

➔

Press to modify the parameter or to move on to the next item.

Warning: The tank and boiler temperatures shown on the display may be different from the actual temperatures by a few degrees, especially in transient phases (just after the preparation phase is completed, just after the end of the cycle, etc.) due to the thermal inertia of the measurement probes.

Adjusting rinse aid dispensing (optional if installed)

Rinse aid dosing

°Rins 1,2g/l

↓

➔

Default: 1,2 g/l.

Adjusting detergent dispensing (optional if installed)

Detergent dosing

°Dete 2,6g/l

↓

➔

Default: 2,6 g/l.

Press to modify the parameter or to move on to the next item.

Autostart function

Automatic start on
door/hood closing

Strt Off

↓

➔

Set at “on” to start the cycle when the door/hood is closed.


Set at “off” for cycle start after confirmation, given

by pressing or a programme icon (e.g. eco) .

Press to modify the parameter or to move on to the next item.

Regeneration frequency setup (models with softener)


- (Default value: **H03**; modify the parameter to suit the mains water hardness.
- At first use, the salt tank has to be filled. It is subsequently sufficient simply to fill up with regenerating salt when necessary.

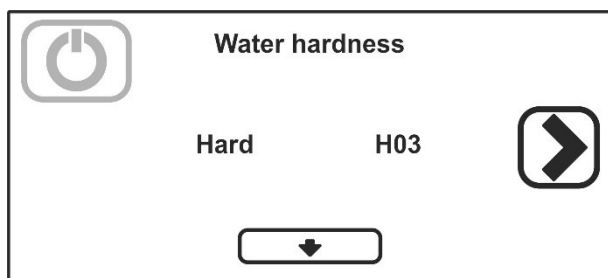

With values over 60°f an external water treatment device must be used and the regeneration frequency **must be set on H00**.

Ppm-mg/l	Hardness (°dH German degrees)	Hardness (°dF French degrees)	Setting level
Regeneration off			H00
150	8,5	15	H01
200	11	20	H02
300	17	30	H03
400	22,5	40	H04
500	28	50	H05
600	33,5	60	H06


Press to modify the parameter or to move on to the next item.

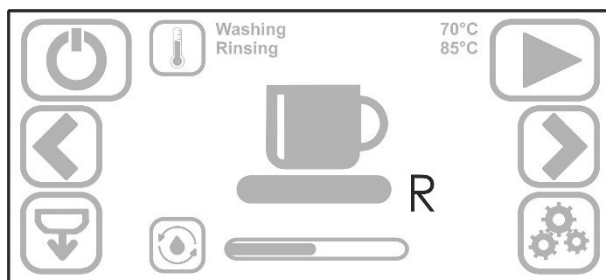

I Important:

Regeneration, **indicated by a red R**, always starts at the end of a wash cycle. **A new wash cycle can be started** during regeneration, but it will be a few minutes **longer**, to include completion of the regeneration process.

Permanent extra rinse

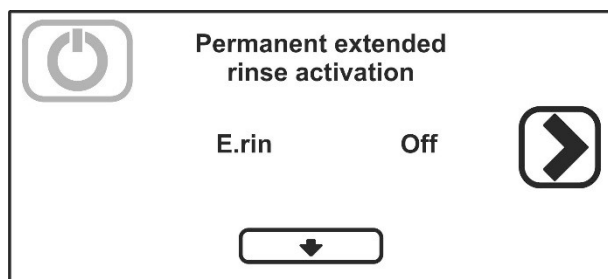


Rinsing is **10"** longer than the standard in each washing cycle.

On: enabled – OFF: disabled.

Press to modify the parameter or to move on to the next item.

Permanent clean water

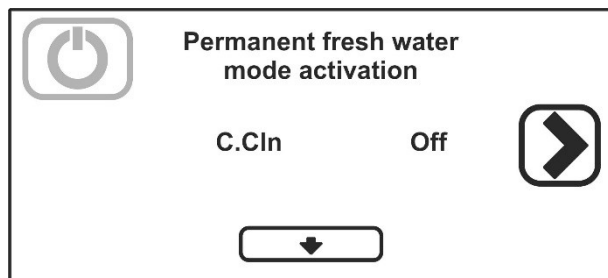


With this option clean water is used for **every washing**. At each cycle, the washing water is completely drained and it is replaced with clean water from rinsing.

On: enabled – OFF: disabled.

N.B.: prolonged use of this option leads to higher detergent and rinse aid consumption.

Press to modify the parameter or to move on to the next item.

Thermostop

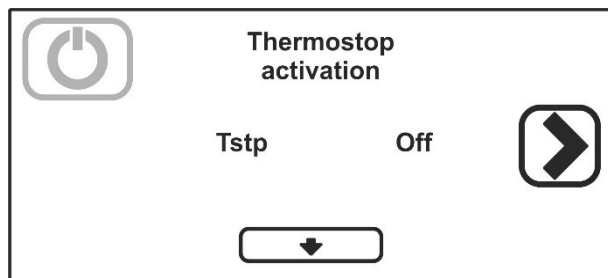

Set as “on” = minimum rinsing temperature as set, (see boiler temperature above) regardless of intake water temperature; the cycle duration may be a few seconds longer than the nominal length.


Set as “off” = the minimum rinsing temperature might be a few degrees lower than the setting if hot intake water is not used.

Press to modify the parameter or to move on to the next item.



If the thermostop device is set “off” the rinsing temperature are no longer monitored and the user is responsible for ensuring that the minimum correct temperature are maintained for the tank and boiler. It is particularly important to check the intake water temperature. Also refer to the insufficient washing/drying /foam in tank point of the “troubleshooting” section : restore **thermostop ON** and/or connect the appliance to a hot water supply.



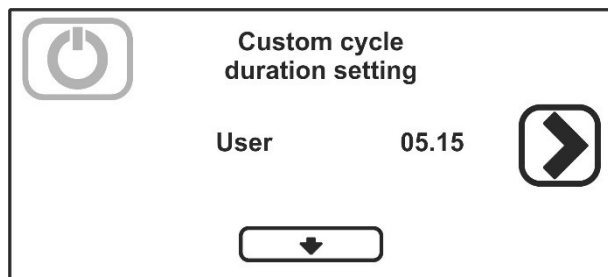



Setting the custom cycle duration



Programme with duration which can be customised









**from 3 minutes 10 seconds
to 10 minutes 10 seconds**

Press to modify the parameter or to move on to the next item.

Display only	
<p>Number of cycles performed since last service</p> <div>  <p>Cycles performed since last maintenance</p> <p>Cn 26</p>   </div>	<p>Total number of cycles performed</p> <div>  <p>Total number of cycles</p> <p>Tc 226</p>   </div>

7.3 Starting the peristaltic pumps – rapid filling of detergent and rinse aid delivery circuit.

Perform after the parameter modification procedure explained in the previous point

<p>Press  to activate the procedure.</p> <p>Bear in mind that the rinse aid peristaltic pump fills the circuit in about 7 minutes, while for the detergent it only takes 2 minutes. At the end of the filling press “ON/OFF” button. So draw only rinse aid from the jerry cans (1 for the rinse aid and the other for the detergent) for the first 5 minutes and then also take in detergent for the last 2.</p> <p>Warning: this operation must be performed when the appliance is installed or when the jerry cans are filled/changed. Do not activate this procedure during normal use as this would cause abnormally high detergent and rinse aid consumption and the formation of foam, potentially leading not only to poor washing results but also dishwasher malfunctions.</p>	<div>    <p>Set up</p>    </div>
	<p>On some models, the message “door” (PCB self-diagnostics on dishwasher closure) may appear during the setup procedure. To reset the message, open the dishwasher door and close it again. If the message persists, contact the after-sales service.</p>

8 MALFUNCTIONS SHOWN ON THE DISPLAY (FOR THE TECHNICIAN)


The dishwasher is able to identify a number of malfunctions and show them on the display. If the problem persists after the dishwasher has been switched off and back on, proceed as described below:

Er 04	Tank temperature probe malfunction	Tank temperature probe disconnected or faulty.
Er 05	Tank water filling malfunction	<ul style="list-style-type: none"> - The tank wasn't filled in the expected time: check the water supply tap, the dynamic supply pressure, cleanliness of the inlet water filter, cleanliness of the rinse nozzles, any damage of the water charging hose. If the problem persists during filling: - Work level tank pressure switch damaged (it always detects "empty": check if the tank safety pressure switch starts operating). - Leakage from the tube connected to the air trap; if the problem is not solved, it occurs during the work program. - vent valve of the drain pipe obstructed with dirt: with siphonage, the tank gets completely empty at the end of a washing program.
Er 06	Water pump-out malfunction	Check: <ul style="list-style-type: none"> - filter cleanliness; obstructions, bending and narrowing of the drain pipe. - possible obstructions of the drain pump (blocked with a foreign body).
Er 23	Boiler does not heat up as expected.	The problem might occur because water is continually entering the tank (the causes are as for " Er 05 " – see above) If the boiler heating element is damaged, this might be due to operation with no water in the boiler - the pressure switch is indicating full even with the boiler empty: - damaged boiler heating element – contactor failure - open on boiler safety thermostat side. - boiler temperature probe faulty or incorrectly positioned - motherboard relay failure, Important: If the boiler heating element is damaged, this might be due to operation with no water in the boiler, pressure switch continues to give full reading even with boiler empty: check boiler air trap and/or relative pressure switch and replace if necessary.
Er 24	Boiler temperature probe malfunction	Boiler temperature probe disconnected or faulty.
Er 25	Boiler water filling malfunction	The boiler wasn't filled in the expected time: check the water supply tap, the dynamic supply pressure, cleanliness of the inlet water filter, any damage of the water charging hose, or check the following in this order: <ul style="list-style-type: none"> - faulty boiler pressure switch (it always detects "empty"),

		<ul style="list-style-type: none"> - leakage or unbinding of the tube (water runs inside the tube) - menu service wrong setting "rP"
Er 26	Boiler emptying malfunction	<ul style="list-style-type: none"> - check cleanliness of the rinse nozzles - faulty boiler pressure switch (it always detects "full") - leakage or unbinding of the tube (water runs inside the tube) - rinsing pump malfunction (if present)
Er 27	Boiler emptying malfunction – with tank full Or boiler full signal on models without rinsing pump	<p>Faulty boiler pressure switch (it always detects "full"). If this occurs in models without rinsing pump, the boiler pressure switch is wrongly detected: check settings in the service menu on entry "rP"</p> <p>"rp" = on for models with rinsing pump "rp" = of for models without rinsing pump</p>

9 INSTRUCTIONS FOR THE USER

Control display

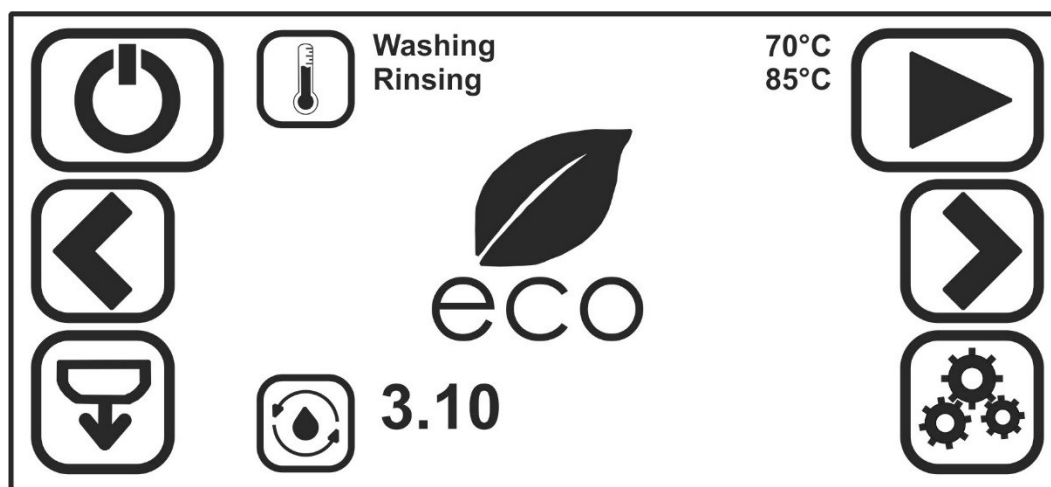

	ON-OFF
	START - PAUSE Press to start the programme, or press the programme icon.
	MENU ITEM and PROGRAMME SCROLL.
	PROGRAMME ICONS. SCROLL < > TO DISPLAY THEM ALL Press to start the programme, or press
	PUMP-OUT
	SETTINGS. GIVES ACCESS TO THE SETUP MENU
	TEMPERATURE DISPLAY for tank and boiler water Press to display the instantaneous temperature of the water in the tank and boiler.
	"CLEAN WATER" OPTION. With this option activated, all the washing water is pumped out and replaced with clean water from the rinse. Deactivated at the end of the wash cycle.
3.10	Duration of programme displayed.
Washing Rinsing	Displays the wash and rinse temperatures (on the right) of the selected programme. They appear in red when heating is in progress.

The instructions apply to "undercounter" and hood-type dishwashers, so some sections of the manual may describe procedures referring to one or the other type, depending on the model purchased (e.g. open the door/lift the hood....).

9.1 Before washing



Use only detergents and rinse aids for industrial dishwashers. Do not use detergents intended for hand washing.






We recommend the use of Smeg products, specially developed for this dishwasher.



When topping up the tanks, take care not to swap the products; this might damage the dishwasher and cause malfunctions.

Do not mix different detergents; this would damage the dispenser device. **Failure to comply** with this recommendation leads to **forfeiture of the warranty** entitlement on the appliance's water system. Industrial dishwasher detergents may cause serious irritation. Comply carefully with the instructions provided by the detergent producer on the pack.

Check:

Turn on the mains water tap (user)	The level of detergent and rinse aid in the containers.	That there is regenerating salt in the relative container (if fitted).	That the filters are in place, the spray arms rotate, and there are no foreign bodies in the dishwasher.	Switch on the master switch (user): the decimal points of both digits appear on the display.
				

9.2 First use each day (tank and boiler empty)


When the control panel is switched on, smeg appears on the screen




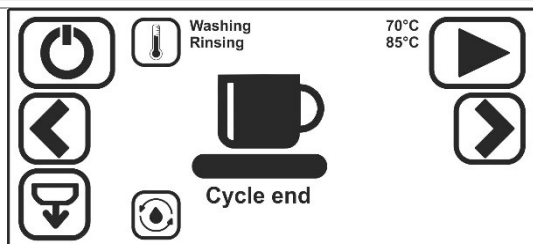
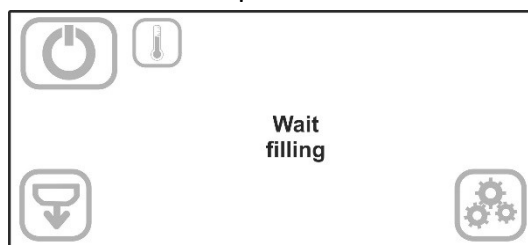
The ON-OFF button then displays in red. Press to switch on; the ON-OFF button turns green.




This screen is displayed for a few seconds

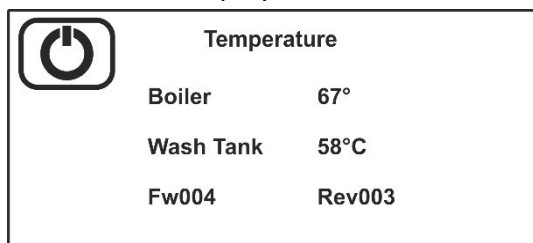

Press  to display the boiler and tank temperature.



With “**Cycle End**” on the display, once the door / hood is opened the dishwasher will be ready for the next wash cycle.

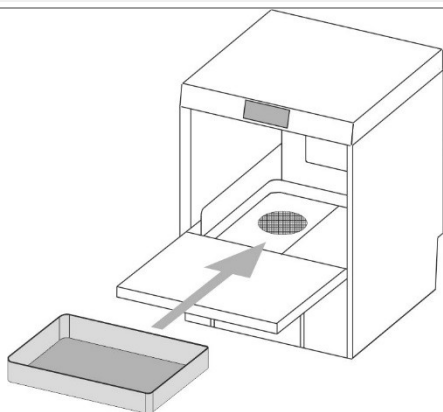

Load the dishes.

Close the door / hood (depending on the model).

N.B.: if the autostart function is set as **ON** and the dishwasher is ready, the cycle starts when the door is closed/the hood is lowered

9.3 Operating anomalies

	<p>Open door. If the door is opened while the cycle is running, the programme stops and "door open" flashes on the display. When the door is closed, if the autostart function is set at ON, the cycle restarts immediately. If the autostart function is set as OFF press the programme icon or start to restart the programme. The programme restarts from the beginning.</p>
<p>Power blackout. When power is restored, the dishwasher automatically returns to its condition when the blackout occurred. If the cycle was running, it restarts from the beginning.</p>	

9.4 Program change











<p>If the programme is running, press start to switch the dishwasher to pause mode</p>	<p>Press to choose the programme required</p>
	<p>Press the programme icon or start to start the cycle.</p>

Notes:

	<p>When Washing XX°C Rinsing XX°C appear in red, the water in the tank (Wash) or boiler (Rinse) is heating up Tank heating does not start until heating of the boiler is completed.</p>
	<p>Filter presence sensor (on some models only) The filter is fitted with a sensor which checks that it is properly fitted; if it is not in the correct position, the alert "Tank filter" appears on the display alternating with the duration of the programme selected.</p>

10 CHOSING THE PROGRAM

Scrolling through the programmes available displays the **programme icon**, the duration of the wash cycle and the wash and rinse temperatures.

PROGRAM		DURATION (*)	CLEAN WATER OPTION 
	Suitable for refreshing or rinsing glasses and crockery.	50 s	X
	Ordinary glasses	1 min	X
	Stem wineglasses	1 min 10 s	X
	Cocktail glasses, sundae dishes ...	2 min 10 s	X
	Beer glasses (**) (rinse with cold water)	4 min	X
	Cups	2 min	X
	Normally soiled plates	2 min	X
	Heavily soiled plates	4 min	X
	Customisable (see "set-up information")	Customisable from 3 min 10 s to 10 min 10 s.	X

(*) The cycle duration stated above is guaranteed if the water intake temperature is as stated and recommended in the "TECHNICAL DATA" table, and in all cases refers to the first cycle performed. For repeated cycles, operating conditions may vary from installation to installation. If the dishwasher is supplied with cold water, the cycle duration might increase depending on the intake water temperature and the "thermostop" setting.

(**) In order for this program to run correctly, the dishwasher must be connected to a cold water supply (see "hydraulic connection" in the booklet). The beer cycle, if selected after a hot rinse cycle, requires at least two cycles to be carried out in order for the rinse to become cold.



The clean water option extends the duration of the wash cycle by about 3 minutes. When it is selected, the duration of the wash cycle shown on the display is updated accordingly.



Door
open


Power blackouts.

If the dishwasher is open when power is restored, the display will read "**door open**" and the heating element will remain off, to prevent the risk of burns to the user.

Close the dishwasher to resume heating the water in the tank.

11 BASKETS PROVIDED

The shape and material of the baskets provided with the dishwasher depend on the purchased model. Extra baskets can be purchased through the After-Sale Service. The following images are indicative.

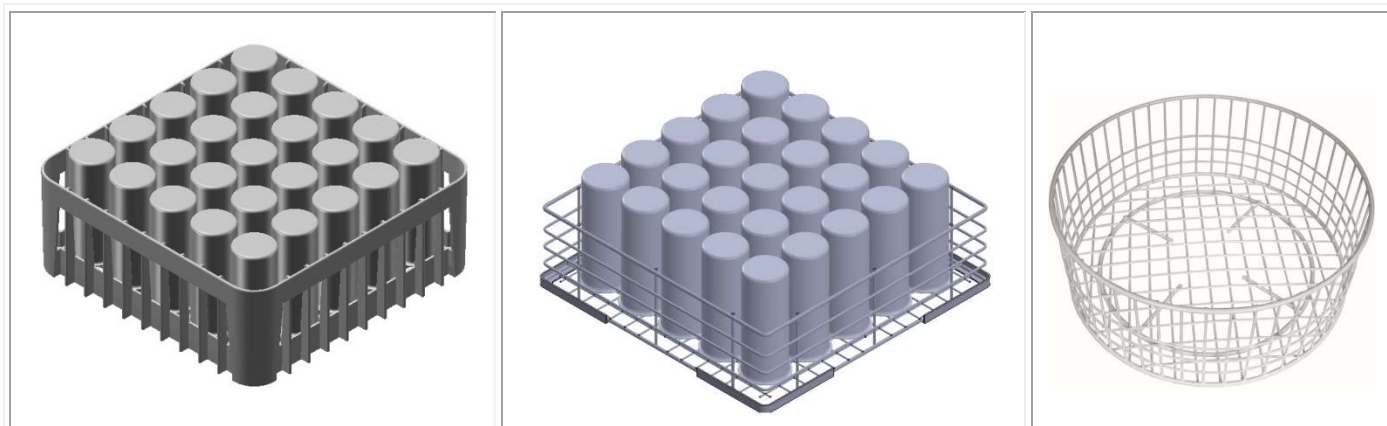

Glasses: Place the glasses downwards.



Cutlery

Use the dedicated basket. Place the cutlery randomly, preferably with the handle downwards, using caution to avoid injuries due to prongs of forks and blades of knives.

12 MAINTENANCE AN CLEANING

We recommend regular servicing by a SMEG authorised service centre at least once a year, to guarantee optimal performance at all times.

Consumables (e.g. peristaltic pump hoses) and/or parts subject to wear and tear must be replaced with genuine SMEG parts.

N.B.: the manufacturer accepts no liability for wilful damage or damage deriving from carelessness, neglect, failure to comply with instructions, regulations and standards or incorrect connections, which lead to forfeiture of warranty cover.




The dishwasher has **IPX4** protection, but the use of direct water jets for cleaning is **forbidden**.

Remove the filters (simply lift them out as shown here), taking care that no large residues fall into the sump underneath. Clean them to remove residues and rinse with plenty of water, then put them correctly back in place; do not use sharp or pointed tools.

Clean away any limescale deposits to prevent excessive build-ups;

If possible, leave the hood or door ajar when not in use;

Clean surfaces thoroughly and often with a damp cloth; use neutral, non-abrasive detergents which do not use chlorine compounds, which corrode and damage stainless steel.

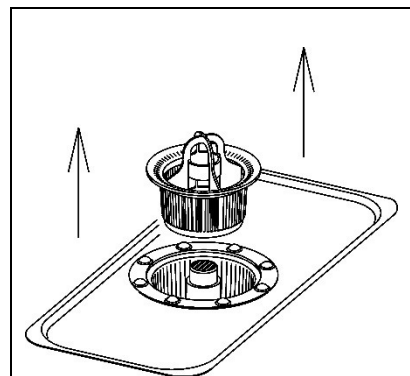

Do not use the products mentioned above even when cleaning the floor underneath or in the vicinity of the dishwasher, to ensure that fumes or drops cannot damage the steel surfaces.

12.1 Total pump-out at the end of the day

<p>Press the pump-out icon </p>	<p>Press pump-out or start </p>
<p>Pump-out in progress</p>	<p>At the end of the pump-out the dishwasher switches off.</p> <p> ON-OFF button red.</p>




Never switch the dishwasher off with water in the tank; always pump out first.
At the end of the working day, after pump-out, the filters should be cleaned.

12.2 Topping up with regenerating salt (for models with softener)

	<p>Warning: use specific salt only, do not use cooking sea salt. Salt must be supplied when the led under the symbol indicated in the left side picture lights up. The salt container has a capacity of about 1 kg of granulated salt.</p> <p>Correct procedure to refill the regenerating salt:</p> <ul style="list-style-type: none"> - start a tank pump-out, - refill the regenerating salt, - fill the tank (FILL) - restart the tank pump-out - remove any salt residues from the bottom of the tank, as it may cause corrosion/rust. <p>This procedure prevents the washing water to enter the salt container (possible damage to the decalcifier) and that possible residues of salt are left in the tank (risk of corrosion/rust).</p>	
--	--	--

12.3 Routine inspection of the spray arm (once a week)

Remove the washing and rinsing (top and bottom) spray arms by unscrewing the central screw; remove the rinsing spray arms 3 and remove the screws 2 as shown. **Do not unscrew the nozzles.** Clean the holes and nozzles under a jet of clean running water; **do not use tools which might cause damage.** Reassemble the spray arms with care.

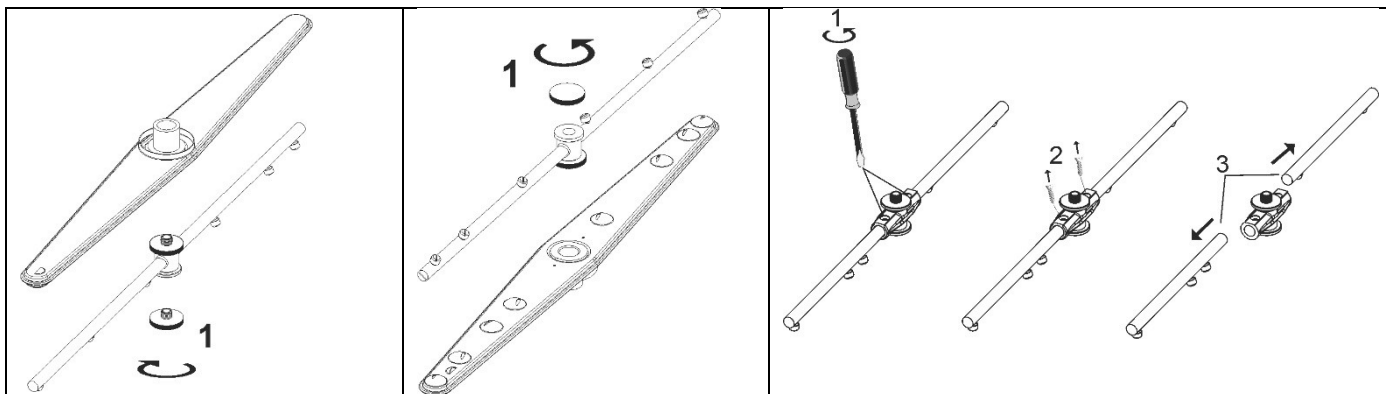

Clean the outside of the appliance with a damp cloth and neutral soap, rinsing and drying thoroughly.

12.4 Lengthy periods out of use

If the dishwasher is to be out of use for a fairly long period of time, **the detergent and rinse aid dispenser devices must be emptied to prevent crystallisation and damage to the pumps:** remove the intake hoses from the detergent and rinse aid containers and place them in a container of clean water, then perform a few wash cycles followed by a complete pump-out. Finally, turn off the master switch, close the water intake valve and leave the hood ajar until the interior is completely dry. The detergent and rinse aid intake hoses must be put back into the containers when the dishwasher is returned to service, **taking care not to swap them over** (red hose = detergent, blue hose = rinse aid).


13 TROUBLESHOOTING

If the system fails to pump out because the drain pump is fouled (as a result of incorrect filter positioning), proceed as follows:
Bale out the dishwasher with a basin and disconnect it from the electrical mains.

Unscrew the screw **A**, release the tang **B** and lift it.

Check that the impeller of the drain pump underneath the cover turns freely, and is free from dirt, limescale residues, or pieces of glass.

Never use tools, screwdrivers, scissors, etc.

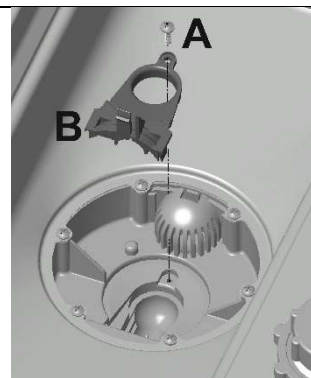

PROBLEM	POSSIBLE CAUSE	POSSIBLE SOLUTION
THE DISHWASHER DOES NOT START	line voltage failure	Verify electricity connection.
THE WASHING PROGRAM DOES NOT START	The dishwasher filling is not over yet.	Wait for the filling process to finish.
	CLOSE stays on display (only for models with display)	If CLOSE continues to appear on the display even when the dishwasher is closed, contact the after sales service.
POOR WASHING RESULTS	Clogged or crusted spray arms holes.	Dismount and clean the spray arms (10.2 Periodical checks)
	Clogged filter	Read “cleaning the filters during the day”
	Insufficient or improper detergent or rinse aid.	Verify detergent type and quantity.
	Failing or insufficient use of detergent or rinse aid: the detergent or rinse aid cannot be withdrawn from the dedicated containers.	Worn or broken internal tube for detergent or rinse aid of the peristaltic pump, to be replaced by the After-Sales Service. This ordinary maintenance service is recommended at least once a year for the correct functioning of the dosers.
	Badly positioned dishes / glasses.	Place dishes / glasses correctly.
	Low washing temperature	Verify the temperature displayed (depending on the model), if it is inferior than 50°C contact customer Support.
	Improper set cycle	Increase the duration of the washing cycle, especially if the load is very dirty or partially dried.

	<p>Clogged nozzles</p> <p>Boiler incrustated with limescale</p>	<p>- Verify that the nozzles are clean and that the water softener, if present, is working correctly.</p> <p>- Verify that the filter of the tube placed inside the rinse aid jerrycan is not clogged.</p>
INSUFFICIENT RINSE	<p>Inappropriate rinse aid, or it is not dispensed correctly.</p> <p>Low rinsing temperature</p>	<p>Verify the rinse aid container and if it is adequate to the type of mains water. Verify the boiler set temperature. Restore T Stop ON and/or connect the machine to hot water. If the problem is not solved, contact the After-Sales Service.</p>
INSUFFICIENT DRYING	<p>Inappropriate rinse aid, or it is not dispensed correctly.</p> <p>Water hardness superior than 12°dF or it contains many dissolved salts.</p>	<p>Verify the rinse aid container and if it is adequate to the type of mains water. If the problem is not solved, contact the After-Sales Service</p>
STAINED GLASSES AND CUTLERY	<p>Rinse aid unsuitable or not being delivered correctly.</p> <p>Water hardness above 12°dF or large amounts of dissolved salts</p>	<p>Check container of rinse aid and whether type is suitable for the mains water- If the problem persists, contact the after-sales service.</p>
WATER LEFT IN THE TANK AFTER PUMP-OUT.	<p>Waste tube badly positioned or partially clogged.</p>	<p>Verify that the tube and drainage are not clogged and that the drainage is not positioned too high; see connection scheme.</p>

14 MALFUNCTIONS SHOWN ON THE DISPLAY (FOR THE USER)

The dishwasher can show a series of malfunctions on display.

After the machine has been switched off and restarted, follow the steps below:

(IF THE PROBLEM PERSISTS, PLEASE CONTACT THE AFTER SALES SERVICE. PLEASE MAKE A NOTE OF THE ERROR BEFORE CALLING)

Err04	Tank temperature probe anomaly	Contact After-sales Service
Err05	Tank water filling anomaly	Check that the water supply tap is open, the dynamic supply pressure, cleanliness of the inlet water filter.
Err06	Water pump-out anomaly (water remains in the dishwasher)	Check that the filters are clean, and that the drain pipe is not bent, obstructed, narrowed. Check that the drain pump is not blocked.
Err09	Excessive water level in the tank anomaly	Contact After-sales Service
Err23	Boiler heating anomaly (does not heat)	Contact After-sales Service
Err24	Boiler temperature probe anomaly	Contact After-sales Service
Err25	Boiler water filling anomaly	Check that the water supply tap is open, the dynamic supply pressure, cleanliness of the inlet water filter.
Err26	Boiler emptying anomaly	Check that the nozzles of the rinsing spray arms are not clogged.
Err27	Boiler emptying anomaly – with full tank	Contact After-sales Service

19.390.7315.02	02/12/2020
Manual rev.	Date